

# Performance Motivate


## Fitness Surfacing

BUILT ON  
**itsTRU**<sup>®</sup>  
TECHNOLOGY

### PRODUCT ATTRIBUTES

- **2.5mm Vulcanized Composition Rubber (VCR) Surface Layer**  
Provides excellent durability and slip resistance
- **5mm Factory Fusion-Bonded VCR Motivate Base Layer**  
Upcycled VCR provides ergonomic support to the athlete

Tailored for light strength and conditioning, this 7.5mm surface combines a 2.5mm VCR surface layer with a 5mm VCR base layer. The result: a balanced distribution of force reduction and energy restitution, designed for the shift in fitness from equipment to more functional training.

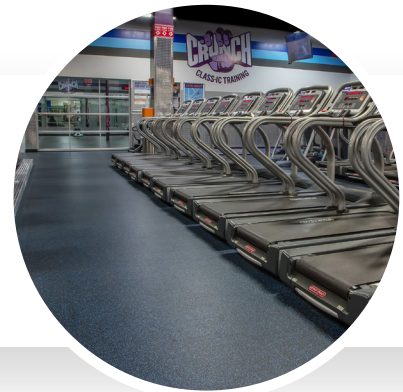

### APPLICATIONS

- Functional Training
- Free Weights
- Cardio
- Selectorized Strength
- Public Spaces
- Childcare / Playzones
- K-12 / Higher Education
- Corporate / Offices

### BENEFITS

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant

### NOMINAL DIMENSIONS

Available as a standard in rolls. Talk to your local sales rep to determine availability, pricing, minimums, and lead times.



7.5mm (2.5mm + 5mm) x 48" (1.22m)

NRG<sup>™</sup>



**Force Reduction: 12.6%**  
Absorption of impact energy




**Energy Restitution: 66.8%**  
Useful return of impact energy

*Typical Deltec Field Tester Results*




# Performance Motivate


## COLOR SWATCHES




Medium Gray ES504




Charcoal ES505




Dark Taupe ES506




Warm Gray ES507




Navy ES508



Green ES509



Maroon ES510



Red ES511




Steel Appeal 2 ES15A




Dark Gray ES502




Mocha Latte 2 ES43A




Blue ES500




Blue Jays ES103




Cardinals ES104




Raiders ES503




Buff Blue 20 ES45



Rippin Red 20 ES47



Grippin Gray 20 ES46



Whey Protein 2 ES97A

## TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Recovery after Static Load	ASTM F970	0.004"
Coefficient of Friction	ASTM D2047	> 0.8
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	Pass
Flammability - Pill Test	ASTM D2859	Pass
Impact Insulation Class [IIC]*	ASTM E492	54
Delta IIC*	ASTM E2179	24

\*Tested on a 6" concrete slab with no ceiling.